


# Commercial Display · Mobile LED Poster Screen (4-fold, can be used for double-sided display)



## Product Features

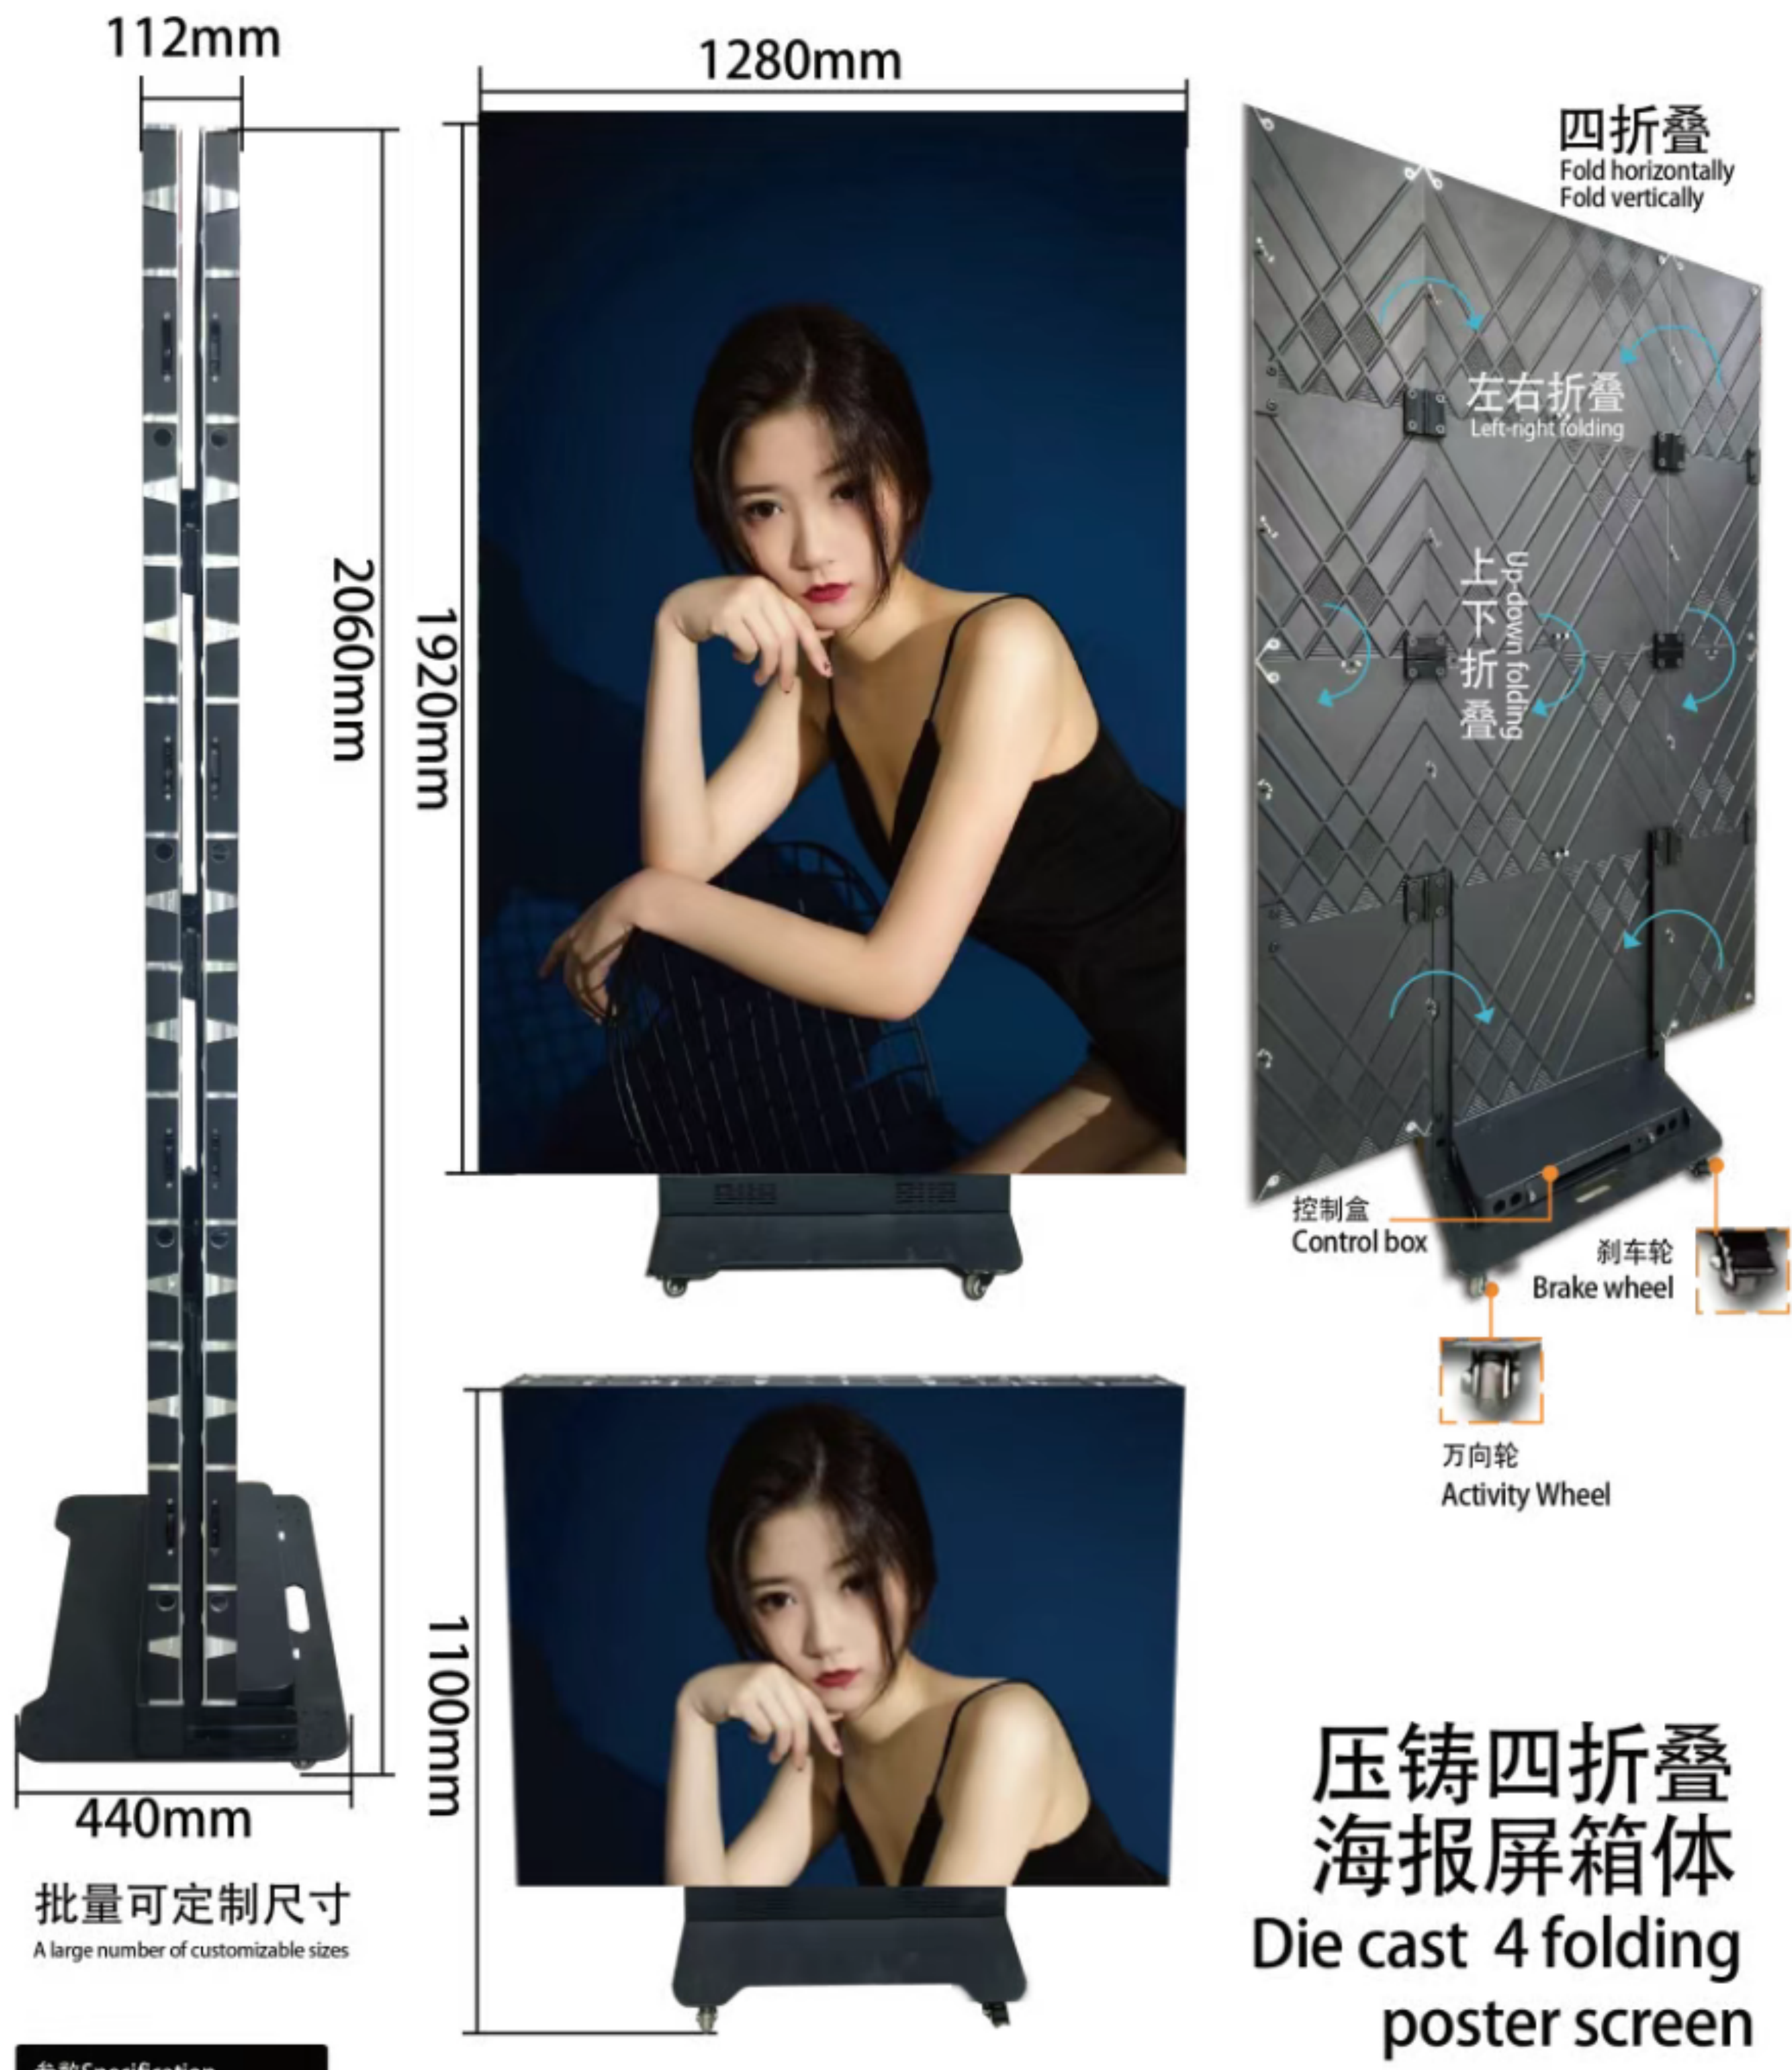

Energy Saving



Ultra-Thin Design



High Brightness



Magnetic Front Maintenance



Wireless Control



High-Definition Display GOB Module

# Commercial Display · Mobile LED Poster Screen (4-fold, can be used for double-sided display)



## Features

- \*Foldable for dual-sided display; multiple units can be tiled to form a large screen
- \*Freestanding on the floor
- \*High-definition display performance
- \*Quick installation & quick maintenance
- \*All-in-one multimedia solution
- \*Multiple usage scenarios: conference venues, exhibition halls, education, and retail

# Commercial Display · Mobile LED Poster Screen (4-fold, can be used for double-sided display)

Specification		ES1.25	ES1.538	ES1.86
model	Pixel Pitch	1.25mm	1.53mm	1.86mm
	LED type	SMD1010	SMD1212	SMD1515
	Module Size	320×160	320×160	320×160
	Module resolution (dots)	256*128	208*104	172*86
	Screen size (WxH)	1280mm x1920mm		
	Screen resolution (WxH) pixels/ screen	1024*1536	832*1248	688*1032
	Frame material	Die-cast aluminum + sheet metal		
	Surface Finish	GOB surface: waterproof, impact-resistant, smooth, and safe to touch		
	Screen weight (Kg/sqm)	≤86kg/pcs		
physical parameters	Calibrated Brightness (cd/m <sup>2</sup> )	≥600nits		
	Refresh Rate(Hz)	≥3840Hz		
	Grayscale level (bit)	14 bit		
	Contrast	10000:1		
	Color temperature (K)	2,800K-10,000K		
	Viewing angle (H/V°)	H160°/V160°		
	Frame rate (Hz)	50/60 Hz		
	Input voltage	100-240V		
	Maximum power consumption of the whole screen	960W		
Average power consumption of the whole screen	288W			
Electronic parameters	Storage temperature (°C)	-20~+45		
	Operating temperature (°C)	~10~+40		
	Storage humidity (RH)	10%~80%		
	Operating humidity (RH)	5%~95%		
	Protection level (front/rear)	IP55X/IP43		
	LED Lamp lifespan	100,000		
	Maintenance method interface	Rear maintenance and front maintenance Supports multiple inputs (WIFI, USB, HDMI, Ethernet).		
Package	1IN1 Flight case	L1455 x W555 x H1315 mm, weight 139 kg		